

NIPPONAIR


INVERTER
R32

GOLDEN FIN




MODELO		RT-09-WRB	RT-12-WRB	RT-18-WRB	RT-24-WRB
CAPACIDAD FRÍO	W	2600 (940-3300)	3400 (1000-3770)	5100 (1250-5910)	6810 (1830-7800)
CAPACIDAD CALOR	W	2610 (940-3360)	3420 (1000-3810)	5100 (1250-6070)	6870 (1850-7900)
SEER	W/W	6.3	6.1	6.1	6.1
CLASIFICACIÓN ENERGÉTICA		A++	A++	A++	A++
EER/COP	W/W	3.25/3.73	3.01/3.71	3.23/3.71	3.11/3.33
CLASIFICACIÓN ENERGÉTICA MEDIA		A+	A+	A+	A+
CAPACIDAD (-10C°)	W	2000	2200	3600	4500
DESHUMIDIFICACIÓN HORA	litros	1	1.2	1.5	1.8
PRESIÓN SONORA (unidad interior (S/H/M/L/Mute))	dB(A)	40/37/33/25/22	40/37/33/25/22	43/41/38/35/27	44/41/38/34/30
PRESIÓN SONORA unidad exterior	dB(A)	50	50	55	57
ALIMENTACIÓN (Unidad interior)		220-240V,50Hz,1F	220-240V,50Hz,1F	220-240V,50Hz,1F	220-240V,50Hz,1F
ALIMENTACIÓN GENERAL A UNIDAD		exterior	exterior	exterior	exterior
RANGO VOLTAJE	kwh/a	165-265	165-265	165-265	165-265
AMPERIO	Frio	A 4.6 (1.2-8)	5.8 (1.5-9)	8.1 (1.7-12)	10.7 (2.3-12.3)
	Calor	A 4.1 (1.2-9)	4.7 (1.5-10)	7 (1.7-13)	9.9 (2.3-13.5)
CONSUMO ELÉCTRICO	Frio	W 800 (240-1380)	1130 (290-1500)	1580 (330-2340)	2257 (410-2824)
	Calor	W 699 (240-1552)	922 (290-1720)	1374 (340-2520)	2063 (420-3005)
CAUDAL unidad interior: frio/calor	m3/h	420/420	550/550	800/800	980/980
INTERCONEXIÓN	Cantidad/sección	4x0.75mm ²	4x0.75mm ²	4x0.75mm ²	4x0.75mm ²
REFRIGERANTE	Tipo	R32	R32	R32	R32
	Líquido/Gas	pulg. 1/4" 3/8"	1/4" 3/8"	1/4" 3/8"	1/4" 1/2"
DISTANCIAS FRIGORÍFICAS	Longitud max.	m 25	25	25	25
	Desnivel max.	m 10	10	10	10
DISTANCIA PRECARGA R32	ml	5	5	5	5
CARGA ADICIONAL R32		gr 15	15	25	25
RANGO TEMP. AMBIENTE	Interior	C° Frio:17-32/Calor:0-30	Frio:17-32/Calor:0-30	Frio:17-32/Calor:0-30	Frio:17-32/Calor:0-30
	Exterior	C° Frio:-15-53/Calor:-20-30	Frio:-15-53/Calor:-20-30	Frio:-15-53/Calor:-20-30	Frio:-15-53/Calor:-20-30
UNIDAD INTERIOR	Dimensiones (ANxPROFxAL)	mm 698x190x255	777x201x250	910x206x294	1010x220x315
	Embalaje (ANxPROFxAL)	mm 764x257x325	850x275x320	979x277x372	1096x297x390
	Peso neto/bruto ud. int. Kg	6.5/8.5	8/10.5	10/13	13/16
UNIDAD EXTERIOR	Dimensiones (ANxPROFxAL)	mm 777x290x498	777x290x498	853x349x602	920x380x699
	Embalaje (ANxPROFxAL)	mm 818x325x520	818x325x520	890x385x628	960x400x732
	Peso neto/bruto ud. ext. Kg	24/26	24/26	35/38	40/43

DIMENSIONES

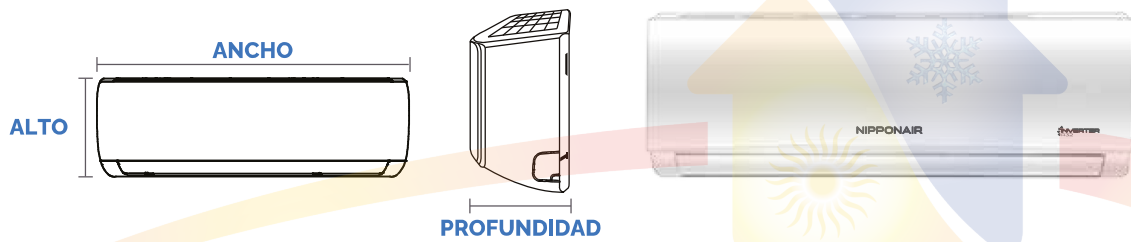

MODELO	ANCHO	PROFUNDIDAD	ALTO
RT-09-WRB	698	190	255
RT-12-WRB	777	201	250
RT-18-WRB	910	206	294
RT-24-WRB	1010	220	315

Unidad: milímetros

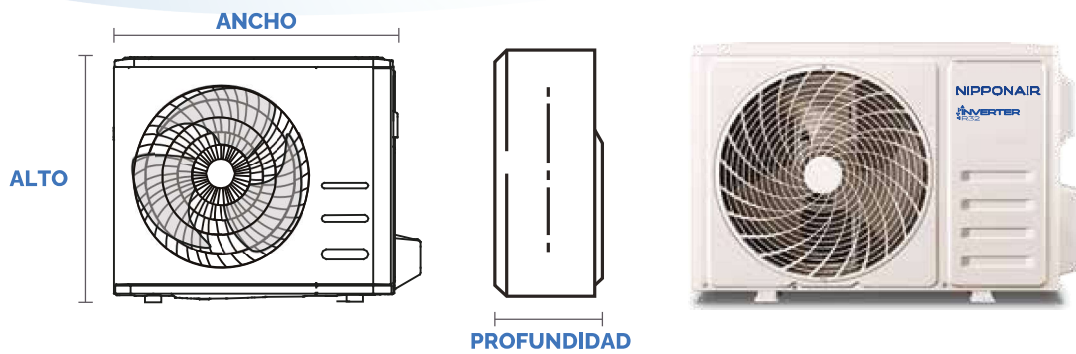

MODELO	ANCHO	PROFUNDIDAD	ALTO
RT-09-WRBE	777	290	498
RT-12-WRBE	777	290	498
RT-18-WRBE	853	349	602
RT-24-WRBE	920	380	699

Unidad: milímetros