


# NIPPONAIR

WIFI  
Incluido

INVERTER  
ELYTE R32



3D AIRflow

GOLDEN FIN

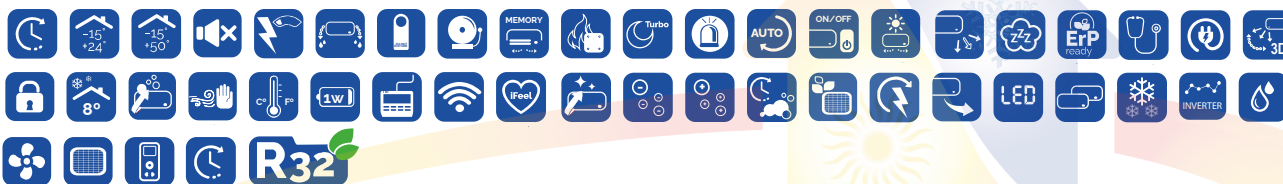

MODELO		RW-09-SB	RW-12-SB	RW-18-SB	RW-24-SB
CAPACIDAD FRÍO	W	2600 (950-3100)	3400 (1000-3770)	5100 (1250-5910)	6800 (1830-7500)
CAPACIDAD CALOR	W	2800 (940-3500)	3600 (1000-3800)	5400 (1250-6800)	7500 (1850-7950)
SEER	W/W	6.1	6.1	6.1	6.1
CLASIFICACIÓN ENERGÉTICA		A++	A++	A++	A++
EER/COP	W/W	3.25/3.73	3.24/3.79	3.25/3.86	3.07/3.95
CLASIFICACIÓN ENERGÉTICA MEDIA		A+	A+	A+	A+
CAPACIDAD FRÍO	Btu/h	9000	12000	18000	24000
SCOP	W/W	4	4	4	4
PRESIÓN SONORA	unidad interior (S/H/M/L/Mute)	dB(A) 40/38/30/21/19	40/39/32/22/19	43/41/34/24/22	44/43/35/27/24
PRESIÓN SONORA	unidad exterior	51	53	55	61
ALIMENTACIÓN	unidad interior	220-240V.50Hz.1F	220-240V.50Hz.1F	220-240V 50Hz 1F	220-240V 50Hz 1F
ALIMENTACIÓN GENERAL A UNIDAD		exterior	exterior	exterior	exterior
ENTRADA DE POTENCIA MÁXIMA	W	1480	1560	2400	3000
AMPERIO	Frio	A 4.6 (1.2-8)	5.8 (1.5-9)	8.1 (1.7-12)	11.3 (2.3-12.9)
	Calor	A 4.1 (1.2-9)	4.7 (1.5-10)	7 (1.7-13)	9.7 (2.3-13.7)
CONSUMO ELÉCTRICO	Frio	W 800 (230-1370)	1050 (280-1500)	1570 (320-2340)	2215 (400-2790)
	Calor	W 750 (240-1600)	950 (290-1750)	1400 (340-2540)	1900 (420-3000)
CAUDAL	unidad interior	m3/h 450	550	850	1020
PRESIÓN MÁXIMA	MPa	4.3	4.3	4.3	4.3
REFRIGERANTE	Tipo	R32/680	R32/750	R32/1300	R32/1450
	Líquido/Gas	pulg. 1/4" 3/8"	1/4" 3/8"	1/4" 1/2"	3/8" 5/8"
DISTANCIAS FRIGORÍFICAS	Longitud max.	m 25	25	30	50
	Desnivel max.	m 10	10	20	20
DISTANCIA PRECARGA R32	ml	5	5	5	5
CARGA ADICIONAL R32	gr	15	15	25	25
RANGO TEMP. AMBIENTE	Temp. ambiente	°C Frio:-15-55/Calor:-15-30	Frio:-15-55/Calor:-15-30	Frio:-15-55/Calor:-15-30	Frio:-15-55/Calor:-15-30
	Temp. de operación	°C Frio:16-32/Calor:16-32	Frio:16-32/Calor:16-32	Frio:16-32/Calor:16-32	Frio:16-32/Calor:16-32
UNIDAD INTERIOR	Dimensiones (ANxPROFxAL)	mm 715x198x295	864x200x300	972x215x320	972x215x320
	Embalaje (ANxPROFxAL)	mm 800x290x380	950x290x380	1070x310x410	1070x310x410
	Peso neto/bruto ud. int.	Kg 8.5/11	9.5/12.5	11.5/14.5	11.5/14.5
UNIDAD EXTERIOR	Dimensiones (ANxPROFxAL)	mm 805x305x495	805x305x495	880x345x555	935x382x702
	Embalaje (ANxPROFxAL)	mm 850x350x550	850x350x550	920x380x600	975x435x770
	Peso neto/bruto ud. ext.	Kg 25/28	25/28	33/37	50/55.5

# DIMENSIONES

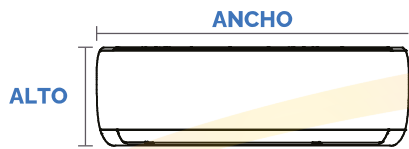


PROFUNDIDAD



MODELO	ANCHO	PROFUNDIDAD	ALTO
R-09-SB	715	198	295
R-12-SB	864	200	300
R-18-SB	972	215	320
R-24-SB	972	215	320

Unidad: milímetros

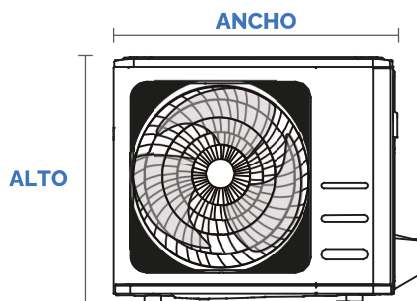

PROFUNDIDAD



MODELO	ANCHO	PROFUNDIDAD	ALTO
R-09-SBO	805	305	495
R-12-SBO	805	305	495
R-18-SBO	880	345	555
R-24-SBO	935	382	702

Unidad: milímetros

**INVERTER**  
ELYTE R32